GET-AS-035D

Indoor

GET·LED

AS series

GET-AS-035D-12

GET-AS-035D-12L

Orgullosos de su alta potencia LED en luminarias **ONE 4 ALL** presenta la serie AS GET•LED para el desarrollo de proyectos arquitectónicos, ideales para decoración, nuestras lámparas usan Led, tipo CREE. Toda la pieza esta realizada en una aleación de aluminio con absoluta presición.

La serie GET•LED arquitectonica aporta a los espacios una iluminación suave y uniforme, con una opción real de tener un ahorro de consumo energético y estar verdaderamente en armonía con el medio ambiente. ideales para uso habitacional y comercial.

Ideales para proyectos en: hoteles, salones de conferencias, oficinas, industrias, hospitales, escuelas, hogares, edif. públicos, etc...

· Diseño integrado, directamente remplaza tus luminarias anteriores tradicionales por las LED.

· Encendido inmediato, no parpadea, no tiene variaciones, amplio rango de voltaje, AC85-300V.

·Seguras, lámparas libres de agentes contaminantes, flujo constante de energía.

The entire piece is made of an aluminum alloy with absolute precision. The GET•LED AS series brings to the architectural spaces an uniform soft lighting mood, with a real choice of an energy-saving light and truly be in harmony with the environment. ideal for residential and commercial use.

Proud of their LED high power lights, ***ONE 4 ALL*** *presents this new series of products made specially for the development of architectural projects, ideal for decoration, our lights use LED -CREE type-.*

GET•LED AS series are ideal for light projects in hotels, conference rooms, offices, industries, hospitals, schools, homes, public builings, etc.

With an integrated design that directly replaces your traditional lights by using LEDs.

Safem lights made free of pollutants, whit a steady flow of energy.

GET-AS-035D

Parameter

Light distribution(配光曲线图)



AVERAGE BEAM ANGLE (50%) : 77.5DEG

Aai figure(灯具有效平均照度图)



CREE 6000K 80°

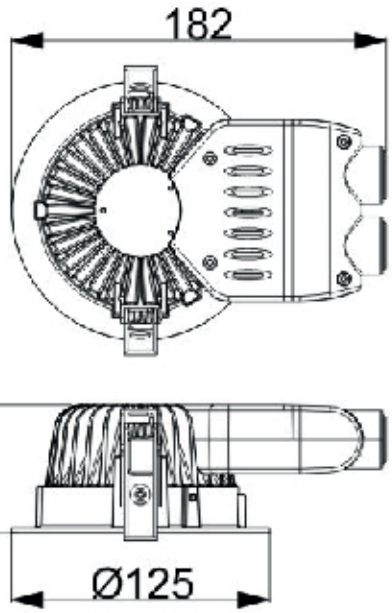

Hole size(开孔尺寸)
Ø115mm

GET-AS-035D-12

GET-AS-035D-12L

Specifications

Model(型号)				
Input voltage(输入电压)	AC 100-240V 50/60HZ， Dimmable AC200-240V 50/60Hz			
Input Current(输入电流)	250mA Max			
Input Power(输入功率)	8W±5%/12W±5%			
Light source(光源类型)	CREE / SMD LED		CREE	
CCT(色温)	3000K/4000K/6000K			
Beam Angle(角度)	80°		15° 30°	
Operation Temperature(工作温度)	-20℃-+50℃			
Lamp working temperature(灯具温度)	≤60℃			
PF(功率因数)	≥0.9			
CRI(显色指数)	≥80(3000K) ≥70(4000K/6000K)			
Surface color(表面颜色)	White(白色)			
Dimming Type(调光类型)	Dimmable(可控硅调光)	External driver(驱动外配)	Dimmable(可控硅调光)	External driver(驱动外配)

50,000h

CE

RoHS

IP20

one 4 all Global Ecological Trading

GET solutions

LED solutions

contact@o4aglobal.com | Tel. +52 (55) 5668 8797

www.one4allglobal.com