GET-B200Af

Outdoor

GET·LED®

B series

Orgullosos de su alta potencia LED en luminarias **ONE 4 ALL** presenta esta nueva serie de productos de ahorro de energía a base de LEDs de alta potencia como fuente de iluminación que supera a la iluminación tradicional.

- **GET•LED Serie B** es una luminaria LED compuesta de una estructurade aluminio con un cristal templado transparente, ma teriales de primera calidad, que proporciona una apariencia elegante donde se coloque.
- Proporciona una iluminación uniforme, con un amplio rango, sin generar sombras.
- Iluminación perfecta en un amplio rango de distancia.
- Ideal para cualquier proyecto de Iluminación arquitectonica; paredes de hoteles o centros comerciales, espacios abiertos, espectaculares, jardines, interiorismo, etc...
- Buena disipación del calor emitido gracias a un diseño tecnológico innovador, con cuerpo de aluminio.
- Amplio rango de voltaje de entrada.
- Proyección del haz de luz a gran distancia con toda la luminosidad, eficiencia y ahorro del **GET•LED**

Intertek 3186663 (on going)

LED Flood Light

Saving with LED power, ***GET•LED B series*** *lights use an aluminum frame with a tempered glass that provides a stylish look where it is placed. The light has a good heat dissipation delivered through innovative technological design, fixture with aluminum body.*

Features:

- *Wide range of input voltage.*
- *Light beam projection at a great distance with the LED power of brightness, efficiency and saving.*
- *Perfect illumination at a wide range.*
- *Ideal for any architectural lighting project; hotels walls or shopping centers, open spaces, gardens, billboards, also indoor projects.*
- *Good heat dissipation delivered through innovative technological design, fixture with aluminum body.*

Product Dimension

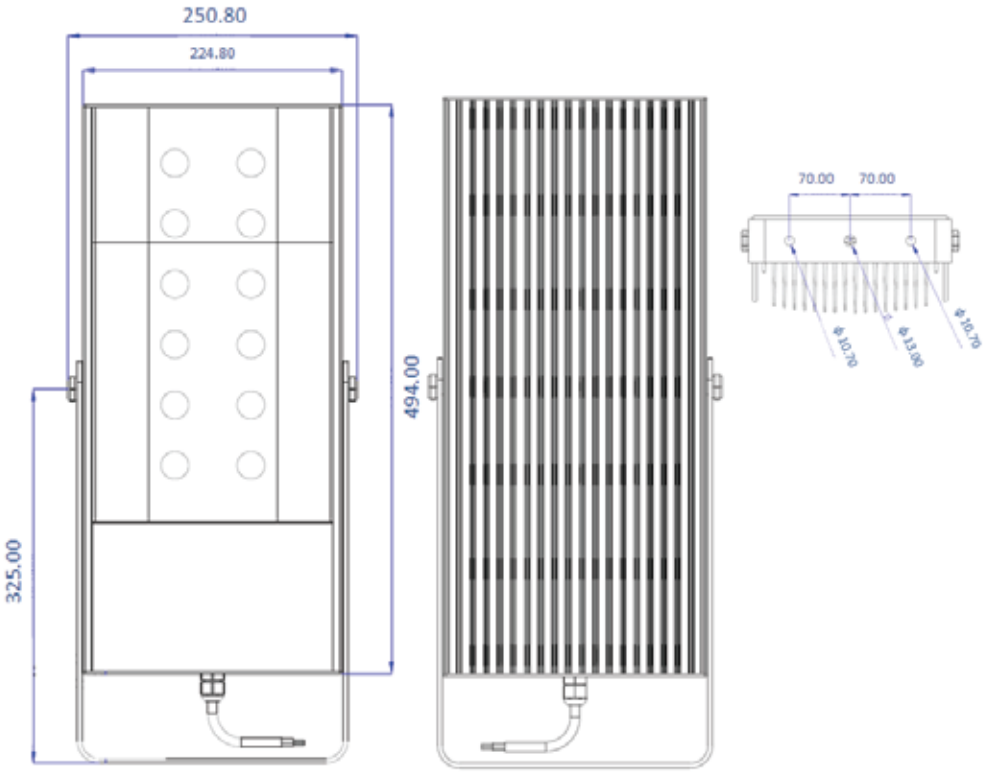

GET-B200Af

Parameter

Specifications

Item	Specification	Details
Output	Beam Angle	15°, 20°, 25°, 30°, 38°, 45°, 60°, 90°, 130°, 135°, 120°x50°, 135°x50°, 120°x60°
	Colour Range	TW / NW / WW
	Lumen Maintenance	50,000hours
Electrical	Input Voltage	24V DC(For Solar Power System) 100 ~ 240V AC
	Power Consumption	192 Watts
Physical	Weight	11.3kg (192 Watts)
	Lens	Optics PMMA
	Operating Temperature	-40°F to 121°F (-40°C to 50°C)
	Humidity	0 - 95%, non-condensing
Certification and Safety	Certifications	CE, RoHs, Laser, ETL(on going)
	Environment	Suitable for damp location
	Warranty	3 years

Optical Characteristics

Dominant Wavelength (nm) or Colour Temperature (K)

CREE LED chips

Correlated Colour Temperature	Min.	Typ.	Max.
True White	5000K	6000K	10000K
Natural White	3700K	4300K	5000K
Warm White	2600K	3000K	3700K

OSRAM LED Chips

Correlated Colour Temperature	Min.	Typ.	Max.
True White	5000K	6000K	7000K
Natural White	3500K	4000K	5000K
Warm White	2700K	3000K	3500K

LUXEON LED Chips

Correlated Colour Temperature	Min.	Typ.	Max.
True White	4500K	5650K	10000K
Natural White	3500K	4100K	4500K
Warm White	2540K	3100K	3500K

Chipset Luminous Flux

24V DC / 100 ~ 240V AC

Chipsets		CREEXT-E
Power Consumption		192 W
Beam Angle		15° /20° / 30° / 45° / 60° / 90° / 130° / 120° x 60/120°x50° /135°x50°
True White	CRI70	21000 lm
Natural White	CRI 80	18500 lm
Warm White	CRI 80	15000 lm
Warm White (2200K)	CRI 80	13200 lm

Chipsets		OSRAM Square
Power Consumption		192 W
Beam Angle		25° /38° / 45° / 60° / 90° / 130° / 135° / 120° x50° / 135°x50° / 120° x 60°
True White	CRI70	23200 lm
Natural White	CRI 80	20400 lm
Warm White	CRI 80	16800 lm

Chipsets		LUXEON Tx
Power Consumption		192 W
Beam Angle		20° /25° / 38° / 60° / 90° / 130° / 135° / 135°x50° /120° x 60°
True White	CRI70	23200 lm
Natural White	CRI 80	20400 lm
Warm White	CRI 80	16800 lm

☒ All Chipset Luminous Flux Data are indicated in max values.

Isolux diagram

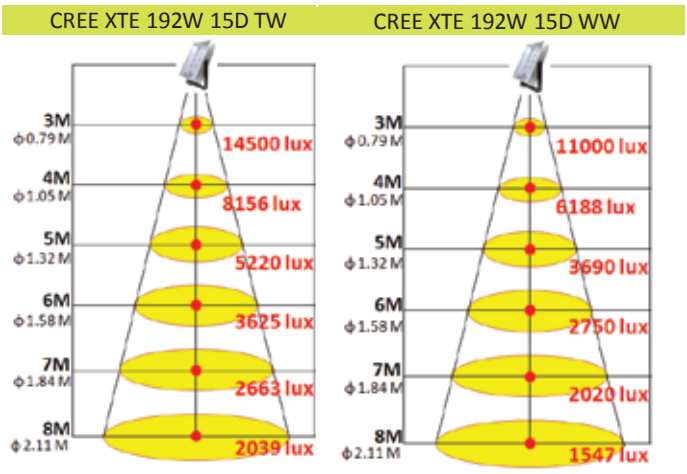

Isolux diagram

GET-B200Af

CREE XTE 192W 20D TW

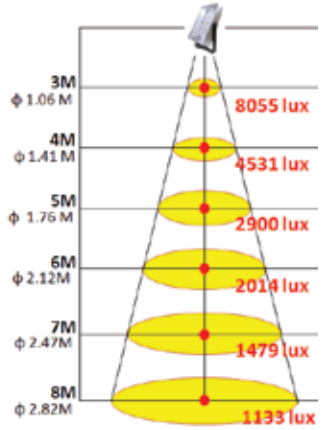

CREE XTE 192W 20D WW

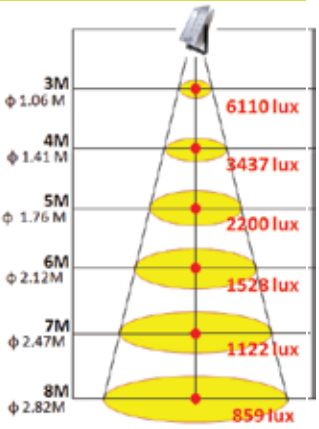

CREE XTE 192W 30D TW

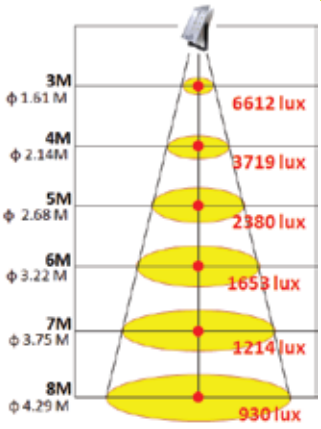

CREE XTE 192W 30D WW

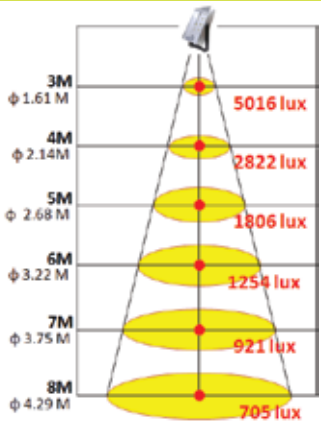

CREE XTE 192W 45D TW

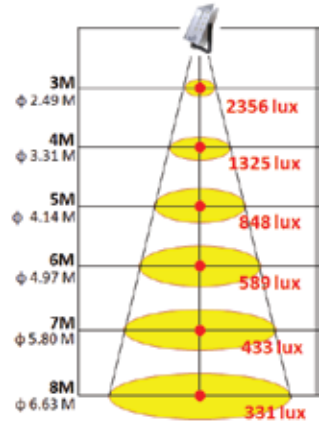

CREE XTE 192W 45D WW

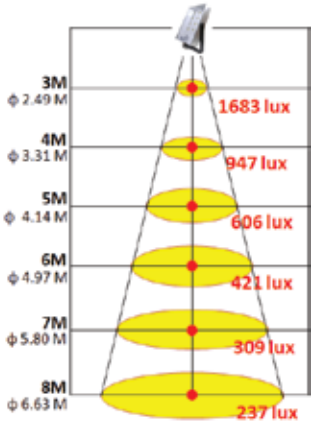

CREE XTE 192W 60D TW

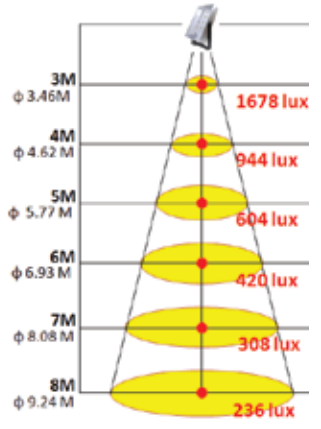

CREE XTE 192W 60D WW

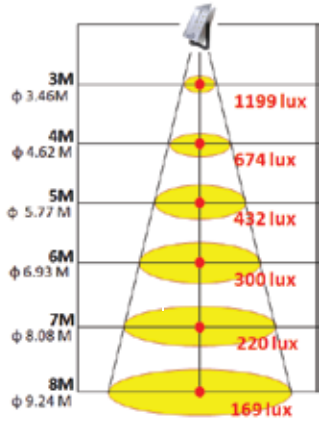

CREE XTE 192W 90D TW

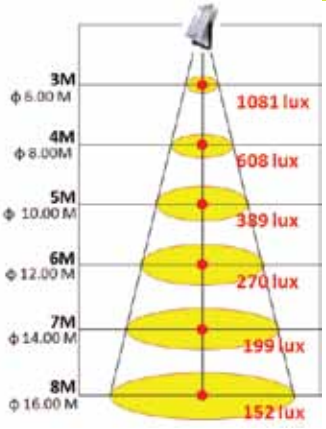

CREE XTE 192W 90D WW

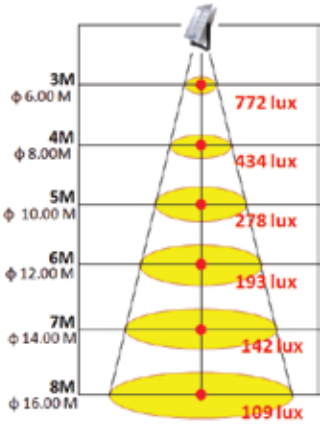

CREE XTE 192W 130D TW

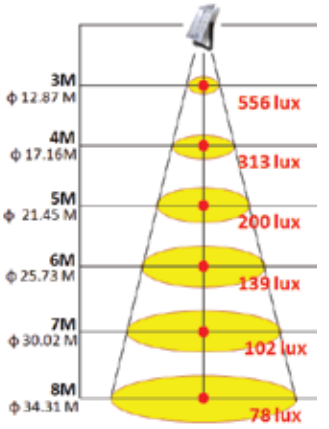
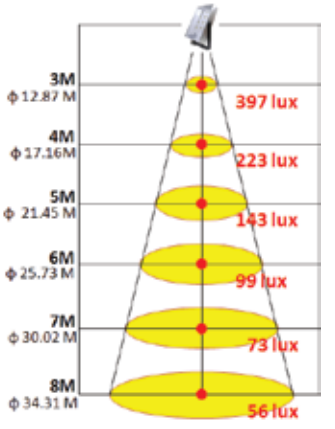
CREE XTE 192W 130D WW