GET-B48

Outdoor

GET·LED®

B series

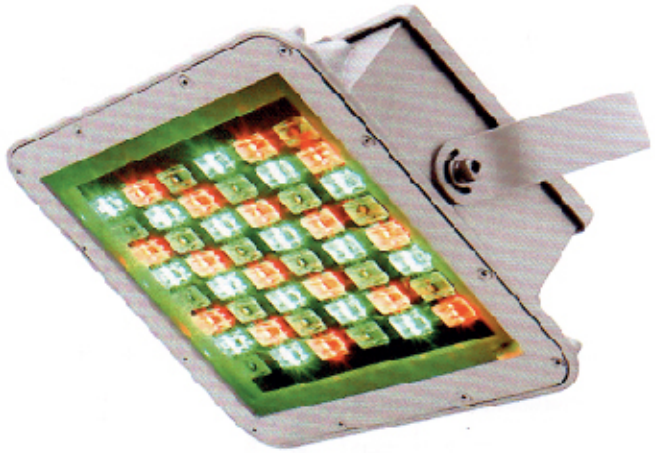

Orgullosos de su alta potencia LED en luminarias **ONE 4 ALL** presenta esta nueva serie de productos de ahorro de energía a base de LEDs de alta potencia como fuente de iluminación que supera a la iluminación tradicional.

- **GET•LED Serie B** es una luminaria LED compuesta de una estructurade aluminio con un cristal templado transparente, ma teriales de primera calidad, que proporciona una apariencia elegante donde se coloque.
- Proporciona una iluminación uniforme, con un amplio rango, sin generar sombras.
- Iluminación perfecta en un amplio rango de distancia.
- Ideal para cualquier proyecto de Iluminación arquitectonica; paredes de hoteles o centros comerciales, espacios abiertos, espectaculares, jardines, interiorismo, etc...
- Buena disipación del calor emitido gracias a un diseño tecnológico innovador, con cuerpo de aluminio.
- Amplio rango de voltaje de entrada.
- Proyección del haz de luz a gran distancia con toda la luminosidad, eficiencia y ahorro del GET•LED

LED Flood Light

Saving with LED power, ***GET•LED B series*** *lights use an aluminum frame with a tempered glass that provides a stylish look where it is placed. The light has a good heat dissipation delivered through innovative technological design, fixture with aluminum body.*

Features:

- *Wide range of input voltage.*
- *Light beam projection at a great distance with the LED power of brightness, efficiency and saving.*
- *Perfect illumination at a wide range.*
- *Ideal for any architectural lighting project; hotels walls or shopping centers, open spaces, gardens, billboards, also indoor projects.*
- *Good heat dissipation delivered through innovative technological design, fixture with aluminum body.*

GET-B48

Parameter

Optical Spec

LED Spec&Quantity	48*1W LED
LED Chip	Bridgelux
LED Color Temperature	3000K-3500K/4000K-4500K/5500K-6500K/over7000k
LED Efficiency	110~130LM/W
Lamp Efficiency	>85LM/W
Initial Delivered Flux Tj=25	4250LM
Normal Luminous Flux Tj=60	3950LM
Illuminance Scope at 6M	112Lux 7m×3.2m
Illuminance Scope at 8M	66Lux 9m×4.2m
Illuminance Scope at 10M	41Lux 11.5m×5.3m
Illuminance Scope at 12M	28Lux 13.8m×6.4m
Color Rendering Index	>75
Beam Angle	120°x 60°;15°/30°/45°/60°Round lens

Electrical Spec

Input voltage Frequency	AC100-277V 50/60Hz
Power Factor	>0.9
Input Power	0.27A(220V)
Total Power Consumption	55W

Temperature Spec

Shell Temperature (Ta=30)	48°C
Junction Temperature (Ta=30)	60°C
Shell Temperature Rise (Ta=30)	18°C
Junction Temperature Rise(Ta=30)	30°C

Other Spec

Operating Temperature&Humidity	20°C~45°C/10~90RH
Storage Temperature	-40°C~60°C
Dimension(mm)	L320*W196*H270mm
Net Weight	5.2±0.2kg
IP Rating	IP65
Lifespan	50000h

Input voltage & Frequency	AC100 - 240V, 50/60Hz
Total Power Consumption	60W
LED model	48x 1W LEDs
Control Mode	DMX 512
Beam Angle	120ºX 60º,15º/ 45º / 60º round lens
Distribution	L320xW196xH270 mm
Material	Aluminium alloy and Tempered glass
Net. Weight	5.4±0.2kg
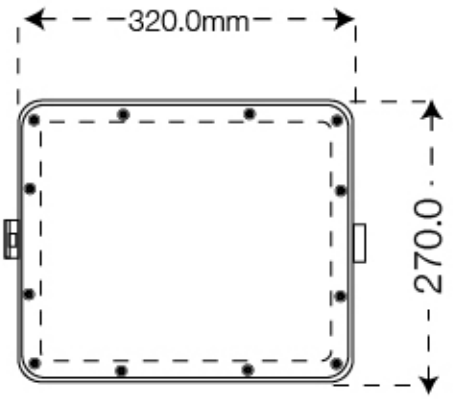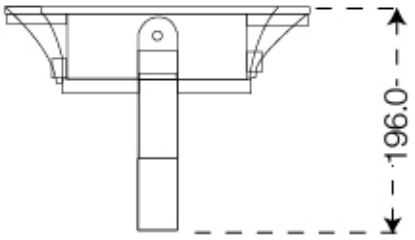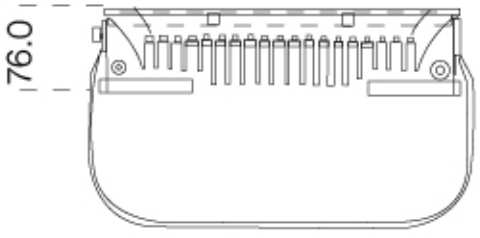
Product Dimension