



Orgullosos de su alta potencia LED en luminarias urbanas **ONE 4 ALL** presenta esta nueva serie de productos de ahorro de energía a base de LEDs de alta potencia como fuente de iluminación que supera a la iluminación tradicional.

El rango de luminosidad **GET•LED** es mucho mayor y mucho más eficaz. Basado en el diseño de doble lente, es el diseño que realmente ha logrado una alta eficiencia luminosa, bajo consumo de energía y una excelente disipación del calor. La **Serie L** de lámparas **GET•LED** tienen una eficiencia luminica superior al 20% * y una disminución en la temperatura del 20%, lo que conlleva un ahorro en los lugares que tienen temperaturas reguladas o asistidas.

*vs. lámparas de tecnologías de vapor de sodio

- Más de un 70% de ahorro de energía
- Módulos LEDs, para un mantenimiento óptimo
- Usamos **CREE LED** originales
- Voltaje de Entrada Universal: AC 85-264V
- Posibilidad de usar un dimmer
- Manufactura de alta calidad, que reduce la temperatura de calentamiento de la luminaria durante su uso.
- Diseño único, de manera rectangular, óptimo para iluminación urbana.





***GET•LED L Series**, street light are based on the double lens design, it has achieved a high luminous efficiency, low power consumption and excellent heat dissipation. They have a higher luminous efficacy than 20%. **

**vs. technologies lamps sodium vapor.*

- *Over 70% energy saving*
- *Lights with LED modules, for optimal service.*
- *We use original CREE LED*
- *Universal Input Voltage: AC 85-264V.*
- *The light can use a dimmer*
- ***GET•LED** has a high quality manufacturing, which reduces the heating temperature of the luminaire during use.*
- ***GET•LED L Series** has an unique design, so rectangular, optimal for urban lighting.*




Isolux diagram

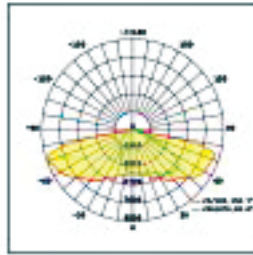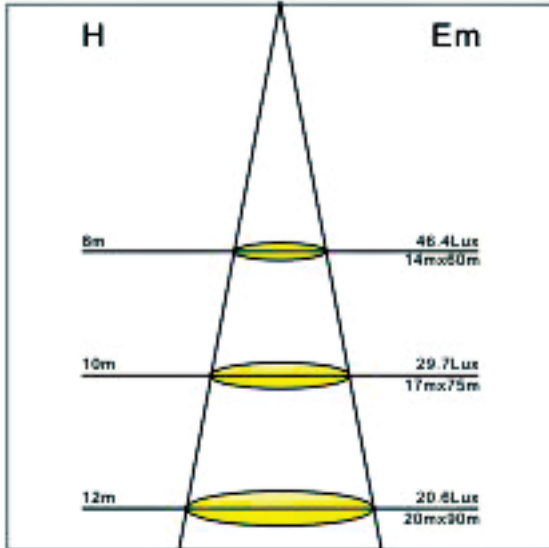

Spectrum chart

Product Dimension

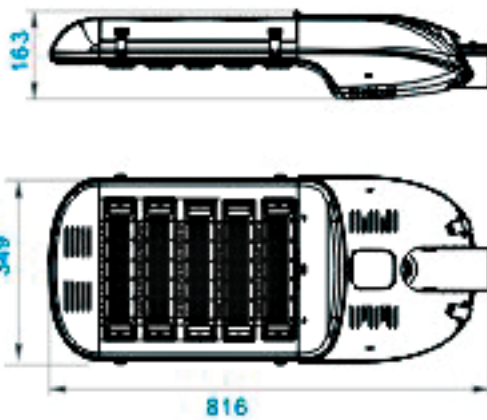


GET-L200mx

Parameter

| Parameter | GET-L200mx |
|-------------------------|-------------------------|
| Optical Spec | |
| Module Quantity | 5 |
| LED Quantity | 80 pcs |
| Lamp Efficiency | >85 LM/W |
| LED Efficiency | 150LM/W |
| Initial Delivered Lumen | 17750LM |
| Normal Luminous Flux | 16150LM |
| LED Color Temperature | 3000K/4000K/5000K/6000K |
| Color Rendering Index | Ra>70 |
| Beam Angle | 150° x 80° |
| Light Distribution | Type III III IV |
| Electrical Spec | |
| Input voltage Frequency | AC100-277V 50/60Hz |
| Power Factor | >0.95 |
| Total power consumption | 190W |
| Power Efficiency | >91% |
| Other Spec | |
| Operating Temperature | -40°C -45°C |
| Operating Humidity | 10-90RH |
| Storage Temperature | -30°C -50°C |
| Dimension (mm) | L816"W349" H163mm |
| Shell material | Aluminium +PC |
| Net Weight | 11.3±0.2kg |
| Lifespan | 50000h |

Product Dimension

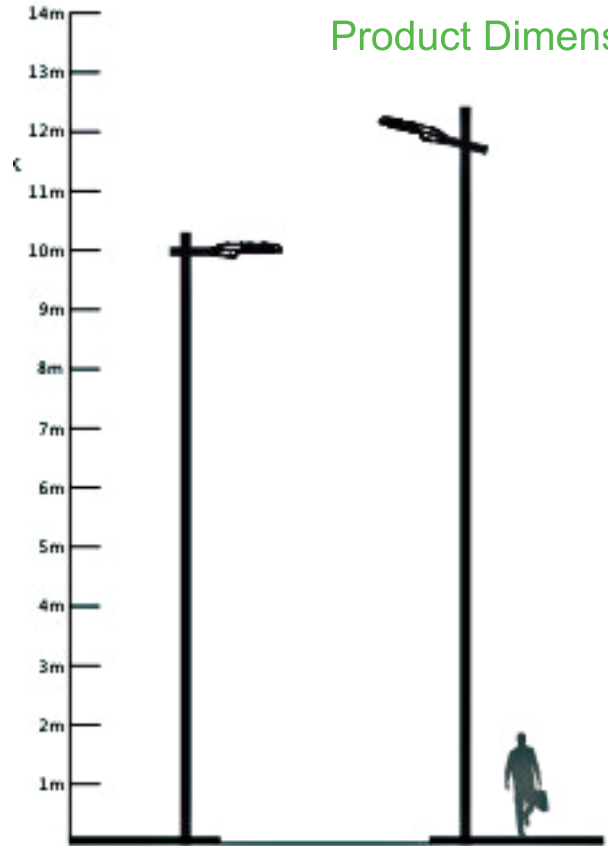

one 4 all
Global
Ecological
Trading

GET
solutions

contact@o4aglobal.com | Tel. +52 (55) 5668 8797

LED solutions



www.one4allglobal.com