



Orgullosos de su alta potencia LED en luminarias urbanas **ONE 4 ALL** presenta esta nueva serie de productos de ahorro de energía a base de LEDs de alta potencia como fuente de iluminación que supera a la iluminación tradicional.

El rango de luminosidad **GET•LED** es mucho mayor y mucho más eficaz. Basado en el diseño de doble lente, es el diseño que realmente ha logrado una alta eficiencia luminosa, bajo consumo de energía y una excelente disipación del calor. La **Serie L** de lámparas **GET•LED** tienen una eficiencia luminica superior al 20% * y una disminución en la temperatura del 20%, lo que conlleva un ahorro en los lugares que tienen temperaturas reguladas o asistidas.

*vs. lámparas de tecnologías de vapor de sodio

- Más de un 70% de ahorro de energía
- Módulos LEDs, para un mantenimiento óptimo
- Usamos **CREE LED** originales
- Voltaje de Entrada Universal: AC 85-264V
- Posibilidad de usar un dimmer
- Manufactura de alta calidad, que reduce la temperatura de calentamiento de la luminaria durante su uso.
- Diseño único, de manera rectangular, óptimo para iluminación urbana.

GET•LED L Series, street light are based on the double lens design, it has achieved a high luminous efficiency, low power consumption and excellent heat dissipation. They have a higher luminous efficacy than 20%. *



*vs. technologies lamps sodium vapor.

- Over 70% energy saving
- Lights with LED modules, for optimal service.
- We use original CREE LED
- Universal Input Voltage: AC 85-264V.
- The light can use a dimmer
- **GET•LED** has a high quality manufacturing, which reduces the heating temperature of the luminaire during use.
- **GET•LED L Series** has an unique design, so rectangular, optimal for urban lighting.



GET-L90sh

Product Dimension (mm)

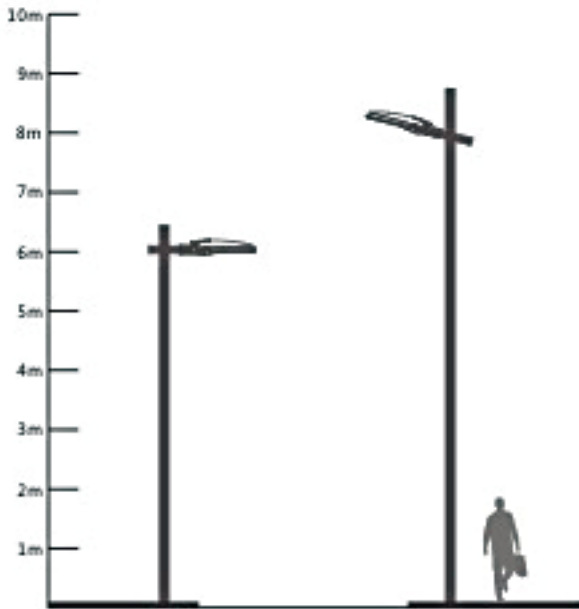

Parameter

Optical Spec	GET-L90sh
Light Source Model	CREE / SAMSUNG
Module Quantity	1
Lamp Efficiency	100 LM/W
LED Efficiency	>135LM/W
Normal Luminous Flux	9000LM
LED Color Temperature	4000K - 5700K ±300K
Color Rendering Index	Ra>70
Light Distribution	Type III III IV
Electrical Spec	
Input voltage Frequency	AC100-277V 50/60Hz
Power Factor	>0.95
Input power	90W
Power Efficiency	>90%
PSU	Class II & 0 - 10V Dim
Control	Intelligent System Option
Other Spec	
Operating Temperature	-40°C -45°C
Operating Humidity	10-90% RH
Storage Temperature	-20°C -40°C
Dimension (mm)	L692"W305" H135mm
Shell material	Aluminium +PC
Net Weight	5.4±0.2kg
Lifespan	50000h

Spectrum chart

