



Marco Claro / Clear frame

GET•LED Panel Light Series, contain materials that provide excellent fire resistance and balance standards with eco-friendly materials.

ONE 4 ALL GET•LED panels are exclusive indoor, made with materials that provide excellent light transmission, providing a soft light effect. **GET•LED** light panels are made with high quality metal sheets, with a cover phosphate-based painting preventing corrosion.

The panels are made of fire retardant materials. Saving consumption of up to 65% less than any other type of panel lights.

Without mercury, no UV rays emitted.

Los paneles de luz LED, para interiores de ONE 4 ALL están hechos de materiales que proporcionan una excelente transmisión de la luz, proporcionando un efecto lumínico de luz suave. Los paneles, tienen materiales que nos da una excelente resistencia al fuego y un balance con los estándares de materiales eco-amigables.

La base para los paneles de luz LED están realizados con láminas metálicas de alta calidad, con una de pintura anticorrosiva a base de fosfato. Los paneles están contruidos con materiales retardantes en caso de fuego.


IDEAL PARA: bares, cafeterías, centros comerciales, hoteles, restaurantes, oficinas corporativas, showrooms, escuelas y hospitales.

- Ahorro de un 65% de consumo, sobre cualquier otro tipo de foco en modelos similares.
- Libre de mantenimiento, ULTRA DELGADOS, varios tamaños disponibles.
- Comportamiento estable, iluminación uniforme, automáticamente hay una regulación de calor, para prevenir un sobrecalentamiento de la pieza.
- Larga duración, amplio espectro de iluminación.
- Sin mercurio y UV.
- Producto amigable con el medio ambiente.



Parameter

Product Name	300 x 300mm Panel Light		
Model No.	GET-PLS-16w		
LED Light Source	3528		
LED Quantity	225 LED		
Lamp Rated Total Luminous Efficiency	61.5 lm/W		
Lamp Rated Total Power	16W		
Lamp Rated Total Luminous Flux	1000 lm		
Color Rendering Index (CRI)	Ra ≥ 75		
Color Temperature(CCT)	Warm white: 3000K		
	Pure white: 4500K		
	Cool white: 6500K		
Beam Angle	110°		
Illumination & Effective Area	Illumination	Effective Area	
	3M Height	40.5 lux	8.43X8.43m
	4M Height	22.8 lux	11.24X11.24m
	5M Height	14.6 lux	14.05X14.05m
	6M Height	10.1 lux	16.86X16.86m
Input Voltage	AC 100–240V		
Frequency	47–63 Hz		
Power Factor(PF)	≥0.9		
Total Harmonic Distortion(THD)	<20%		
Storage Temperature	-40°C – +60°C		
Working Environment	-20°C – +45°C; 10% – 90% RH		
Working Lifetime	> 50000 hours		
IP Rating	IP43		
Lamp Body Material	Aluminum Alloy		
Net Weight	1.2 kgs		
Gross Weight	1.45 kgs		
Product Dimension(mm)	300 x 300 x 38mm		
Package Size(mm)	365 x 673 x 112mm		

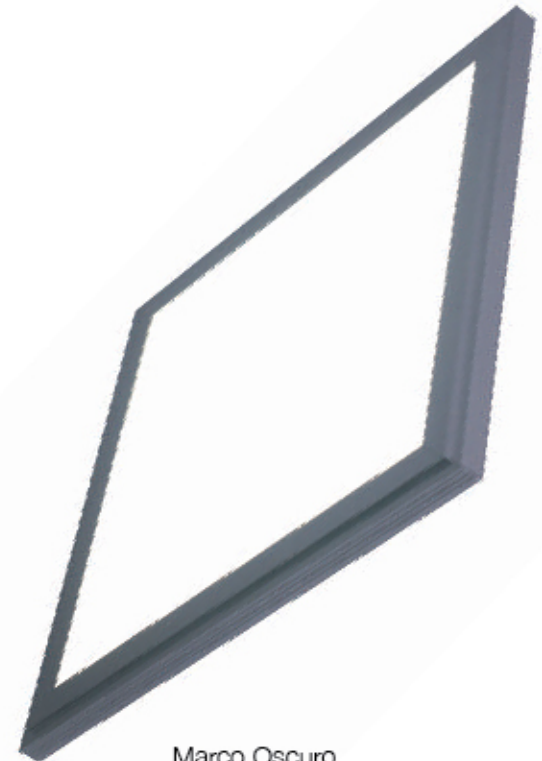

Marco Oscuro
Dark frame