GET-TLS-T8-15

Indoor

GET•LED

TLS series

Las lámparas tubulares de GET•LED **ONE4ALL,** es el nuevo producto, eco-amigable, con gran eficacia en la iluminación.

Usando los LED como su fuente de iluminación, generando baja temperatura y un consumo de voltaje reducido, hacen de estas lámparas un producto seguro y costeable. El Tubo LED tiene la misma apariencia y tamaño que los tubos fluorecentes, pero con un gran ahorro de energía, una mayor vida útil y más amigables con el medio ambiente, con una duración de más de 50,000 hrs continuas.

Disponibilidad de tubos de luz cálida y fría, tambien con resistencia a altas / bajas temperaturas.

Fácil Instalación: instale los tubos LED en los mismos soportes que los tubos fluoresentes, solo remueva las balastras antes de colocarlos, ya que contamos con el tamaño y forma universales de los tubos fluoresentes, haciendo estas lámparas listas para remplazar los tradicionales.

Alta calidad de los LED utilizados en su elaboración, son un producto no contaminante, que genera un bajo consumo de energía, una larga vida útil. Se cuenta con una amplia gama de colores y temperaturas disponibles.

Item	5FT/1500
Unit	mm
A(Min)	1497
A(Max)	1499
B(Min)	1504.6
B(Max)	1505.5
C(Max)	1513
D(Max)	32.5

__GET•LED__ tubular lamps is the new eco-friendly product, an affordable replacement for flourecents lights. Using LED as its light source and generating a low temperature and a low voltage consumption, these lamps are safe and affordable.

Easy Installation:

Just install __GET•LED__ tubes in the same media that fluoresentes tubes, just remove the ballast before placing them, since we have the same size and universal inputs fluoresentes tubes, making these lamps ready to replace the traditional one

- *Good appearance*
- *90°rotatable end cap;*
- *High efficiency, high CRI & high PF;*
- *Aluminium alloy body with good heat sink ability;*
- *Safe isolated driver against over current & voltage;*
- *UL/TUV/ROHS/PSE/CCC/CQC approval;*

Lux Data

T8/T10 9W(6000K)



T8/T10 11W(6000K)



T8/T10 18W(6000K)

T8/T10 21W(6000K)

T8/T10 23W(6000K)



T8/T10 26W(6000K)

Dimension

GET-TLS-T8-15

Parameter

	Item No	GET-TLS-T8-15-01			GET-TLS-T8-15-02		
1.5M	power	24W	24W	24W	24W	24W	24W
	Voltage	100V-277VAC50/60Hz			100V-277VAC50/60Hz		
	Isolated	Single ended/double ended			Single ended/double ended		
	Power Factor	>0.9			>0.9		
	LED Type	SMD3014			SMD2835		
	LED Qty	238pcs			180pcs		
	CRI(Ra)	>80			>70		

	CCT	2700K-3200K		3700K-3200K		6000K-7000K		2700K-3200K		3700K-3200K		6000K-7000K	
1.5M	Cover	Clear	Milky	Clear	Milky	Clear	Milky	Clear	Milky	Clear	Milky	Clear	Milky
	Lumens	2000±100lm	1800±100lm	2200±100lm	2000±100lm	2200±100lm	2000±100lm	2200±100lm	2000±100lm	2400±100lm	2200±100lm	2400±100lm	2200±100lm
	Lamp Efficiency	80lm/w	70lm/w	90lm/w	80lm/w	90lm/w	80lm/w	90lm/w	80lm/w	100lm/w	90lm/w	100lm/w	90lm/w
	Beam Angle	120°						120°					
	Shell Material	Aluminum Alloy+PC						Aluminum Alloy+PC					
	Base	G13						G13					
	Operating Temperature	-20°C-40°C						-20°C-40°C					
	Operating Humidity	10%-90%RH						10%-90%RH					
	IP	IP20						IP20					
	Dimension(mm)	Ø26x1498						Ø26x1498					
	Packing(mm)	1584x463x228mm(50pcs/Carton)						1584x463x228mm(50pcs/Carton)					
	Net Weight	0.46kg						0.46kg					
	Lifespan	30000h						30000h					
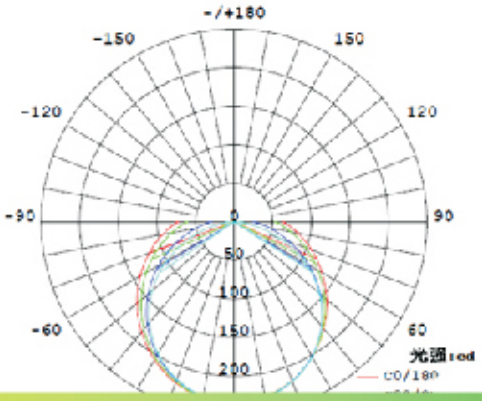
Viewing Angle